

ACCESS DOORS

BY **WINTeCH**

*Excellence in door solutions
for the metal building industry.*



EXPI-DOOR[®] Systems Inc.

MEMBER OF THE BAY FAMILY OF COMPANIES

ACCESS DOORS

With a wide range of thermal and non-thermal framing members, allowable skin types and thickness, our access doors can be customized to fit just about any air handling application and specification.

FEATURES / OPTIONS

- 1" & 1 1/2" Deep Single Gasket Doors
- 2", 3", 4" Deep Double Gasket Doors
- Insulated with free rise foam
- R values from 6.67 - 26.68
- Non-thermal and thermal framing
- Positive and negative swing applications
- Wide variety of skin materials
- Various standard hardware preps, supplied hardware and factory installed hardware options
- View ports in multiple sizes and glass configurations
- Continuous stainless hinges, or XYZ adjustable hinge options
- Industry leading air and water performance
- Standard and FDA compliant EPDM gaskets
- Extruded aluminum door leaf frame
- Powder coat painted finishes available
- Custom sizes



HIGH PERFORMANCE DOOR FEATURES / OPTIONS


- 2", 3" & 4" Deep Double Gasket Doors
- Thermal or Non-Thermal frame options
- Insulated with free rise foam
- R values from 6.67 per inch depth
- Positive and Negative pressure Applications
- Double door configurations
- Wide range of skin material options
- Up to 20" Water Column performance
- Independently tested including view ports and hardware*
- Standard and FDA compliant EPDM gaskets
- Reinforced extruded aluminum framing
- Powder coat paint options
- Positive door testing
 - 50 mph negative wind
 - No internal unit pressure
 - No leakage
- Factory prep for hardware or fully installed hardware options
- Includes a new view port design, Independently tested to 20 inches Water Column
- Continuous Stainless Steel piano hinges or XYX adjustable hinge options
- Custom sizes

* Door testing certified with Allegis K2 latches and view port exposed to pressure



INSULATED PANELS

- Range of thickness from 1" to 4", allowing a wide range of applications and performance
- Insulated with free rise foam, providing R-values from 6.67 - 26.68
- Bonded materials provide strength and deflection performance
- Extruded aluminum frame provides perimeter panel strength and anchorage
- Custom sizes of 4" to 144" widths and heights to fit your design
- Wide variety of skin materials such as aluminum, stainless, galvanized, etc. to meet your specification
- Powder coat painted finishes available, factory applied paint for durability
- Factory cut outs allow for clean application for air handling accessories
- Corner keyed and crimped framing for added strength and structural performance

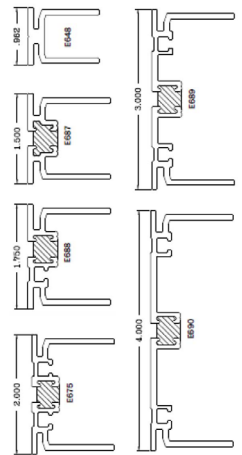

EXPI-DOOR® Systems Inc.

MEMBER OF THE BAY FAMILY OF COMPANIES

3146 Yeager Drive, Green Bay, WI 54311
Phone: 920-393-4028 Fax: 920-393-4452
www.expi-door.com

For More
Information
on our
Access Doors:

