




SD Doors

Positive / Inswing Access Doors

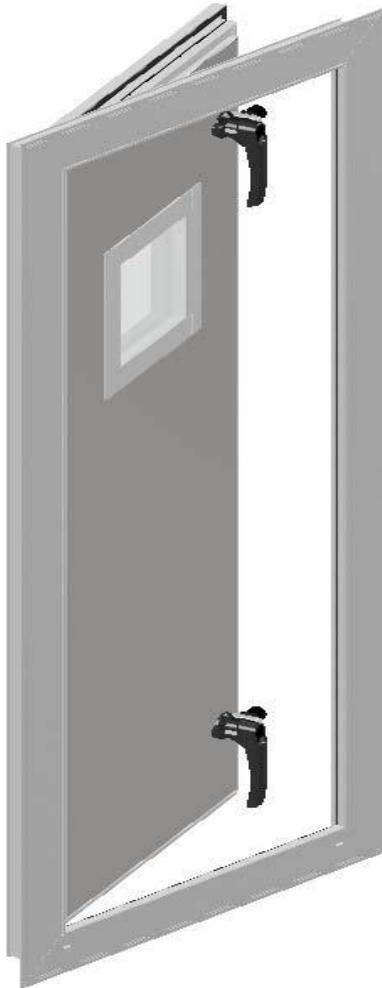

SD Series Positive Pressure Door Performance Data

| | |
|--------------------------|---|
| Air Infiltration | <.01 cfm/ft ² @ 20" Water Column |
| Water Resistance | No Leakage @ 20" Water Column |
| Two-Part Isocyanate Foam | CARB Complaint HFO Blowing Agent |
| Foam R-Value | 6.67 per 1" Depth |
| Frame & Door Depth | 2", 3", & 4" |
| EPDM Gasket | UL157 & FDA Complaint |
| Viewport | 1" Insulated & 1/4" Mono Glazing |
| Door Hardware | Allegis K2 & Others |
| Door Hinges | Stainless Steel Piano & 3-Way Adjustable |
| Door Panel Skins | Galvanized, Stainless Steel, Smooth Alum, Galvannealed, Embossed Alum, & Others |

*Contact WinTech for further door performance information and other options