

SERIES DB

BY **EXPI-DOOR**®

*Excellence in door solutions
for any building application.*



EXPI-DOOR® Systems Inc.

MEMBER OF THE BAY FAMILY OF COMPANIES

SERIES DB

STANDARD KEY FEATURES

The Series DB is built from high-quality components, designed to meet commercial standards at a competitive price.

Compare the following:

Pre-Primed

All doors and frames are baked-on primer, meeting ANSI A250 Standards. Tested for salt spray, humidity, abrasion, and adhesion. Gray, white, or bronze.

Doors

Available as 20 gauge or 18 gauge galvanized (A60), polystyrene core, square edge. Flush mounted door leaf. Doors meet commercial Steel Door Institute (SDI) standards.

Frames

16 gauge galvanized (A60), 5 3/4" frame depth with 2" x 2" header. Frames meet commercial Steel Door Institute (SDI) standards.

Locks



Grade 2 Commercial. Five-year manufacturers warranty.

Wall Anchors

Multiple different anchoring systems for steel stud, wood stud, masonry and metal building applications.

Hinges



Ball bearing US26D satin chrome hinges with security non-removable pins.

Other

Full ADA 5 3/4" aluminum threshold, dual finger TPE sweep, and self-sticking silicone bulb weatherstrip. All components meet commercial standards and ADA requirements.

WARRANTY

Series DB Doors have a complete two-year warranty minimum on all standard components.

PREASSEMBLED PRODUCT



OPTIONS



Subjamb

Flush mount only. 16 gauge subjamb and subframe header replace the need for a framed opening. Full 7'2" in height and can be modified to fit.



Grade 1 Lever Lock

Grade 1. Free wheeling, pressure release, vandal resistant lever. Ten-year manufacturers warranty.




Exit Device

Commercial-duty grade 1 rim exit device. Aluminum finish. Key-in-lever or escutcheon-with-lever trim. Three-year warranty.



Auto Closer

Commercial-duty grade 1 surface applied closer. Backcheck, sweep and latch speed adjustment valves. Three-year warranty.



Latch Guard

Steel latch guard with US32D stainless steel finish. Prevents tampering with the latch on lever locks.

LITE KITS




24x30



9x30

SWING: SPECIFY USING CHART BELOW

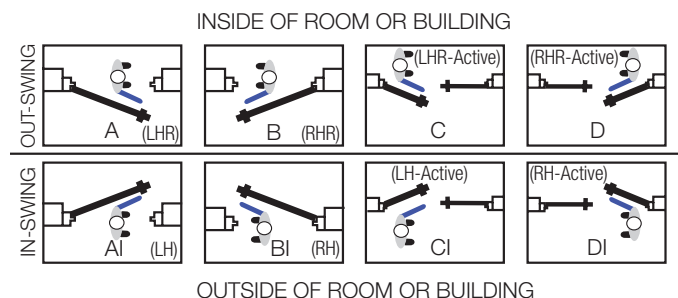

Other terminology:

LHR = A = RH

RHR = B = LH

EXPI-DOOR® Systems Inc.

MEMBER OF THE BAY FAMILY OF COMPANIES

3146 Yeager Drive, Green Bay, WI 54311
Phone: 920-393-4028 Fax: 920-393-4452
www.expidoor.com

