SERIES 700

BY **EXPI-DOOR®**

Excellence in door solutions for the metal building industry.

EXPI-DOOR® Systems Inc.

MEMBER OF THE BAY FAMILY OF COMPANIES

SERIES 700

STANDARD KEY FEATURES

The Series 700 is comprised of the highest quality components in conjunction with a proprietary anchoring system. Our standard components and features are the competition's upgrades. Compare the following:

Doors
18 gauge galvanized (A60), polyurethane, R-Value 11.1, U-Value .10, ASTM C-236 insulated core, interlocking seam. Doors meet commercial Steel Door Institute (SDI) standards.

Frames
Welded frame.16 gauge galvanized (A60), 5 3/4" standard frame profile, interlocking mitered-corner connection (then welded). Frames meet commercial Steel Door Institute (SDI) standards.

Locks
Schlage Grade 2, AL53PD-626-SAT. Meets ANSI A156.2 series 4000, grade 2 requirements. Thru bolted for added strength. Free wheeling vandal resistant lever.

Subjambs
16 gauge galvanized (A40 minimum) subjamb. Proprietary offset subjamb/jamb anchor system allows self-trimming; no jamb trim required. Flush subjamb also available, required for wind and fire-rated doors.

Paint Finish
All doors and frame have a baked-on beige primer coat meeting ANSI A250 standards. Paint test for salt spray, humidity, and adhesion.

Hinges
Ball bearing 26D satin chrome hinges with security non-removable pins.

Packaging
Doors are stacked on wood skid, connected through the subjambs, or with separation between for doors without subjambs. Doors are enclosed in OSB for protection during shipping.

PREASSEMBLED PRODUCT

Other
Full 5 3/4" aluminum threshold, dual finger TPE sweep, and silicone bulb weatherseal for kerfless type application. All components meet commercial standards and ADA requirements.

NOW WITH A 10-YEAR WARRANTY!

TEN-YEAR WARRANTY

The Series 700 is covered by a ten-year warranty on the door leaf and frame, guaranteeing the product to be free of defects in materials and workmanship (certain hardware components have longer warranties).

OPTIONS

Wind & Fire Polystyrene Offerings

UL Standard 45-minute, 90-minute, and 3-hour ratings available. All levels of coastal/wind requirements available.

Schlage Grade 1 Lever Lock

Schlage D53PD grade 1 entrance lock. Vandal resistant free wheeling levers. Independent heavy duty spring cages for lever support. Thru bolted for positive interlock to door. Tested to 3,000,000 cycles, 3 times the ANSI requirement!

Schlage Mortise Lever Lock

Schlage heavy duty grade 1 mortise lever lockset with escutcheon plate. 3/4" latch throw and 1" deadbolt throw.

Von Duprin/Falcon Exit Devices

Various heavy duty grade 1 rim exit devices from Von Duprin (Series 22 and 99). Various finishes and trim options.

LCN Auto Closers

Grade 1 surface applied closers. Backcheck, sweep and latch speed adjustment valves.
LCN 1261 (standard-to-moderate-duty).
LCN 1461 (moderate-to-heavy-duty).
LCN 4040XP (extra-power heavy-duty).

Latch Guard

Steel latch guard with US32D stainless steel finish. Prevents tampering with the latch on lever locks.

LITE KITS

9x30

24x30

SWING: SPECIFY USING CHART BELOW

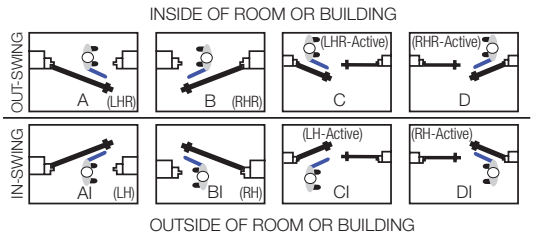

Other terminology:
LHR = A = RH = LHO (left hand out)

RHR = B = LH = RHO (right hand out)

EXPI-DOOR® Systems Inc.
MEMBER OF THE BAY FAMILY OF COMPANIES
3146 Yeager Drive, Green Bay, WI 54311
Phone: 920-393-4028 Fax: 920-393-4452
www.expidoor.com

Pub.No. 54190102 000/0526PTP Rev.0526