

SERIES 700

BY **EXPI-DOOR**®

*Excellence in door solutions
for the metal building industry.*



EXPI-DOOR® Systems Inc.

MEMBER OF THE BAY FAMILY OF COMPANIES

SERIES 700

STANDARD KEY FEATURES

The Series 700 is comprised of the highest quality components in conjunction with a proprietary anchoring system. Our standard components and features are the competition's upgrades. Compare the following:

Doors

18 gauge galvanized (A60), polyurethane, R-Value 11.1, U-Value .10, ASTM C-236 insulated core, interlocking seam. Doors meet commercial Steel Door Institute (SDI) standards.

Frames

Welded frame. 16 gauge galvanized (A60), 5 3/4" standard frame profile, interlocking mitered-corner connection (then welded). Frames meet commercial Steel Door Institute (SDI) standards.

Locks

Schlage Grade 2, AL53PD-626-SAT. Meets ANSI A156.2 series 4000, grade 2 requirements. Three-year warranty. Thru bolted for added strength. Free wheeling vandal resistant lever.

Subjamb

16 gauge galvanized (A40 minimum) subjamb. Proprietary offset subjamb/jamb anchor system allows self-trimming; no jamb trim required. Flush subjamb also available, required for wind and fire-rated doors.

Paint Finish

All doors and frame have a baked-on beige primer coat meeting ANSI A250 standards. Paint test for salt spray, humidity, and adhesion.

Hinges

Ball bearing 26D satin chrome hinges with security non-removable pins.

Packaging

Doors are stacked on wood skid, connected through the subjamb, or with separation between for doors without subjamb. Doors are enclosed in OSB for protection during shipping.

Other

Full 5 3/4" aluminum threshold, dual finger TPE sweep, and silicone bulb weatherseal for kerfless type application. All components meet commercial standards and ADA requirements.

PREASSEMBLED PRODUCT



**NOW WITH
A 10-YEAR
WARRANTY!**

TEN-YEAR WARRANTY

The Series 700 is covered by a ten-year warranty on the door leaf and frame, guaranteeing the product to be free of defects in materials and workmanship (certain hardware components have longer warranties).

OPTIONS



Wind & Fire Polystyrene Offerings

UL Standard 45-minute, 90-minute, and 3-hour ratings available. All levels of coastal/wind requirements available.



Schlage Grade 1 Lever Lock

Schlage D53PD grade 1 entrance lock. Vandal resistant free wheeling levers. Independent heavy duty spring cages for lever support. Thru bolted for positive interlock to door. Tested to 3,000,000 cycles, 3 times the ANSI requirement! Ten-year warranty.



Schlage Mortise Lever Lock

Schlage heavy duty grade 1 mortise lever lockset with escutcheon plate. 3/4" latch throw and 1" deadbolt throw. Three-year warranty.



Von Duprin/Falcon Exit Devices

Various heavy duty grade 1 rim exit devices from Von Duprin (Series 22 and 99). Various finishes and trim options. Three-year warranties.



LCN Auto Closers

Grade 1 surface applied closers. Backcheck, sweep and latch speed adjustment valves. LCN 1261 (standard-to-moderate-duty); 20-year warranty. LCN 1461 (moderate-to-heavy-duty); 30-year warranty. LCN 4040XP (extra-power heavy-duty); 30-year warranty.



Latch Guard

Steel latch guard with US32D stainless steel finish. Prevents tampering with the latch on lever locks.

LITE KITS




9x30



24x30

SWING: SPECIFY USING CHART BELOW

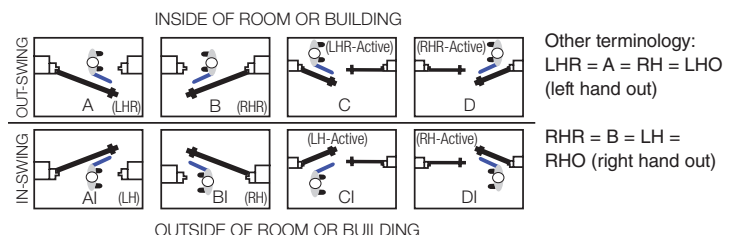

EXPI-DOOR® Systems Inc.

MEMBER OF THE BAY FAMILY OF COMPANIES

3146 Yeager Drive, Green Bay, WI 54311
Phone: 920-393-4028 Fax: 920-393-4452
www.expidoor.com

